

DESCRIPTION


The 2SC3356RWT1G is an NPN silicon epitaxial transistor designed for low noise amplifier at VHF, UHF and CATV band.

It has dynamic range and good current characteristic.

S- Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.


ORDERING INFORMATION

Device	Marking	Shipping
2SC3356RWT1G S-2SC3356RWT1G	24R	3000/Tape & Reel
2SC3356RWT3G S-2SC3356RWT3G	24R	10000/Tape & Reel



FEATURES

- We declare that the material of product compliance with RoHS requirements.
- Low Noise and High Gain
NF = 1.1 dB TYP., $G_a = 11$ dB TYP. @ $V_{CE} = 10$ V, $I_c = 7$ mA, $f = 1.0$ GHz
- High Power Gain
MAG = 13 dB TYP. @ $V_{CE} = 10$ V, $I_c = 20$ mA, $f = 1.0$ GHz



ABSOLUTE MAXIMUM RATINGS ($T_A = 25$ °C)

Collector to Base Voltage	V_{CBO}	20	V
Collector to Emitter Voltage	V_{CEO}	9	V
Emitter to Base Voltage	V_{EBO}	3.0	V
Collector Current	I_c	100	mA
Total Power Dissipation	P_T	150	mW
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-65 to +150	°C







ELECTRICAL CHARACTERISTICS ($T_A = 25$ °C)



CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	I_{CBO}			1.0	μA	$V_{CB} = 10$ V, $I_E = 0$
Emitter Cutoff Current	I_{EBO}			1.0	μA	$V_{EB} = 1.0$ V, $I_C = 0$
DC Current Gain	h_{FE}	75	170	320		$V_{CE} = 8$ V, $I_c = 25$ mA
Gain Bandwidth Product	f_T		7		GHz	$V_{CE} = 10$ V, $I_c = 20$ mA
Feed-Back Capacitance	C_{re}^{**}		0.55	1.0	pF	$V_{CB} = 10$ V, $I_E = 0$, $f = 1.0$ MHz
Insertion Power Gain	$ S_{21e} ^2$		11.5		dB	$V_{CE} = 10$ V, $I_c = 20$ mA, $f = 1.0$ GHz
Noise Figure	NF		1.1	2.0	dB	$V_{CE} = 10$ V, $I_c = 7$ mA, $f = 1.0$ GHz

* Pulse Measurement $PW \leq 350$ μs , Duty Cycle ≤ 2 %


* The emitter terminal and the case shall be connected to the guard terminal of the three-terminal capacitance bridge.

TYPICAL CHARACTERISTICS (T_A = 25 °C)

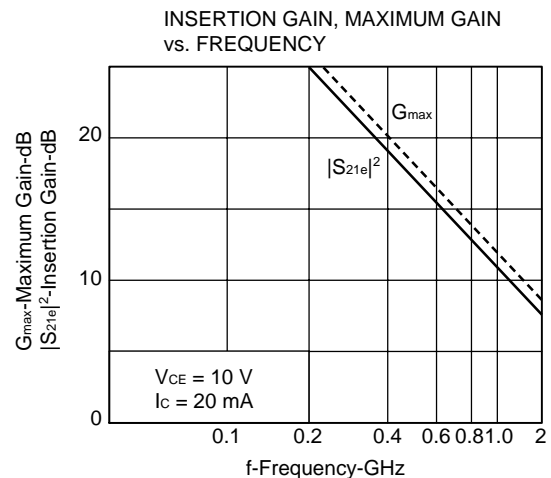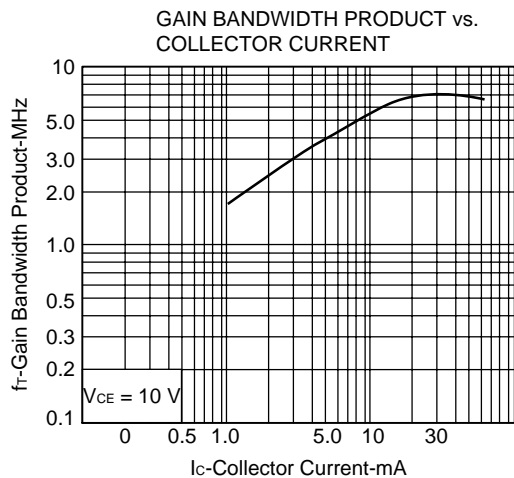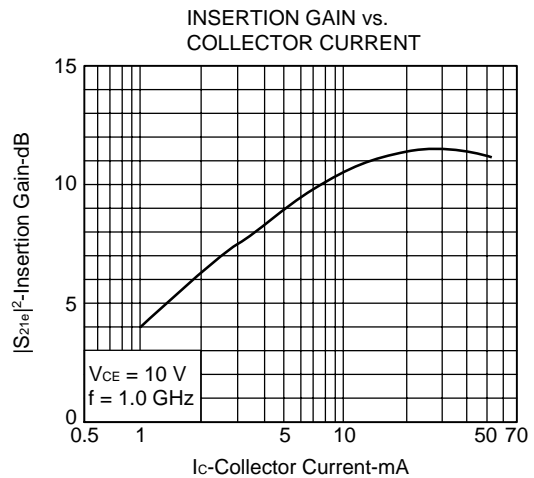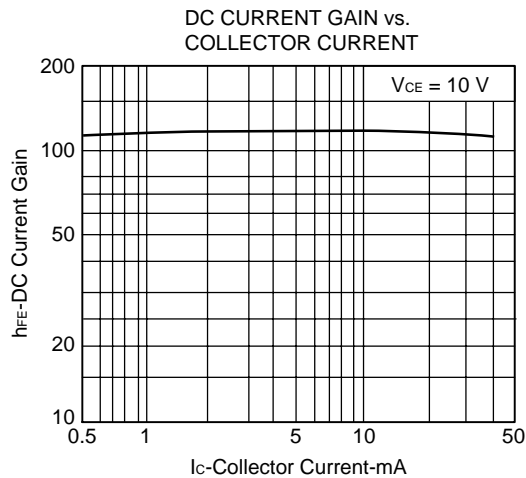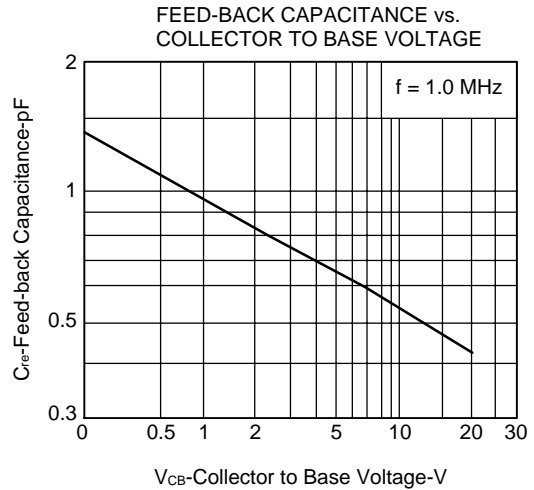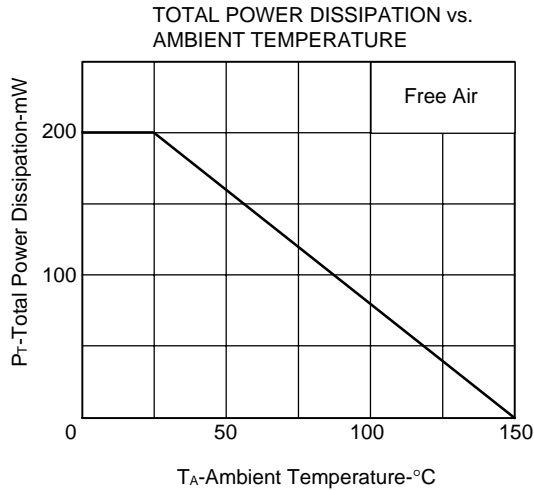

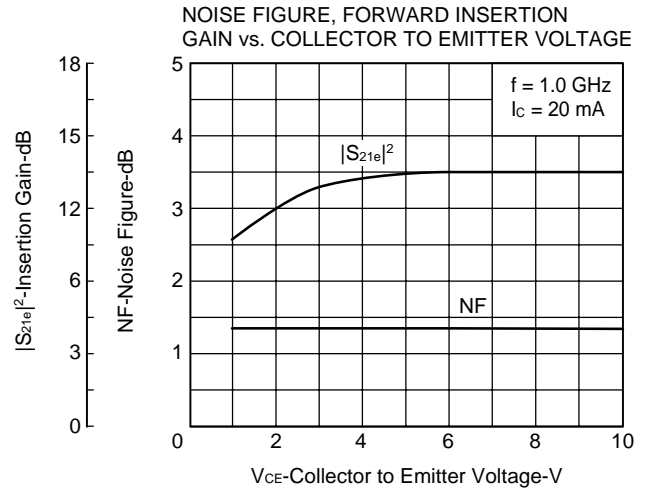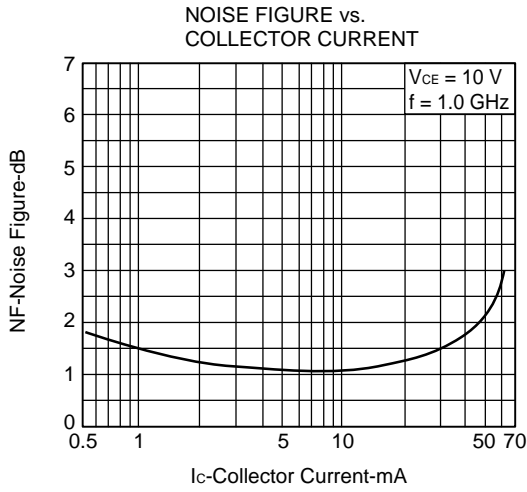


SC-70

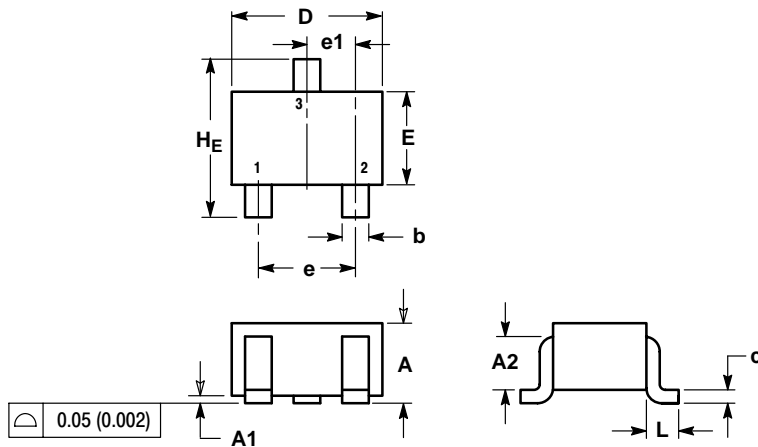

- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	0.90	1.00	0.032	0.035	0.040
A1	0.00	0.05	0.10	0.000	0.002	0.004
A2	0.7 REF			0.028 REF		
b	0.30	0.35	0.40	0.012	0.014	0.016
c	0.10	0.18	0.25	0.004	0.007	0.010
D	1.80	2.10	2.20	0.071	0.083	0.087
E	1.15	1.24	1.35	0.045	0.049	0.053
e	1.20	1.30	1.40	0.047	0.051	0.055
e1	0.65 BSC			0.026 BSC		
L	0.425 REF			0.017 REF		
HE	2.00	2.10	2.40	0.079	0.083	0.095

GENERIC MARKING DIAGRAM



- XX = Specific Device Code
- M = Date Code
- = Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present.

